


# QLogic FastLinQ QL45462HLCU

40GbE Converged Network Adapter

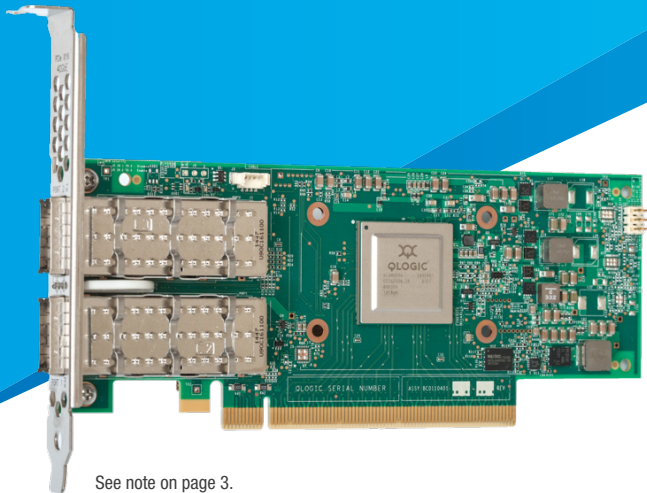

See note on page 3.

- Fully featured 40GbE adapter delivers the best price per performance ratio versus 10GbE
- Increase VM density and accelerate multitenant networks with full offload for tunneling protocols
- Build powerful scale-out storage systems with QLogic’s unique support of universal RDMA (RoCE, RoCEv2, and iWARP)
- Accelerate the most demanding telco NFV workloads with the QLogic DPDK high-speed packet processing engine
- Orchestrate hyperscale OpenStack® deployments with QLogic QConvergeConsole® cloud-enabled management framework
- iSCSI and FCoE hardware-based offloads

## OVERVIEW

QLogic® FastLinQ® QL45462HLCU dual-port Converged Network Adapter leverages QLogic’s seventh-generation technology to deliver true 40Gb per second (40Gbps) Ethernet performance. Optimized for use across enterprises, managed service providers, and large public and scalable private cloud deployments, the QL45462HLCU enables organizations to achieve new levels of performance in physical, virtual, and cloud environments.

The QLogic FastLinQ QL45462HLCU 40GbE Adapter delivers advanced features, including:

- Cutting-edge server virtualization technologies—single-root I/O virtualization (SR-IOV) and NIC partitioning (NPAR)
- Network virtualization—offloads for VXLAN, GENEVE, and NVGRE
- Multiple, concurrent RDMA technologies—RDMA over Converged Ethernet (RoCE), RoCEv2, iSCSI Extensions for RDMA (iSER)—are extensible to support iWARP
- Converged Network Adapter functionality—stateless offloads of iSCSI and FCoE protocols

### REDUCE CAPITAL EXPENDITURES (CAPEX) AND OPERATIONAL EXPENDITURES (OPEX)

QLogic QL45462HLCU 40GbE technology delivers better price-per-gigabit ratio versus 10GbE. This technology enables cloud providers and large-scale data center operators to reduce operating expense while continuing to scale their network of server and storage nodes to meet increasing demands of the future.

### ACCELERATE ANY NETWORK WITH UNIVERSAL RDMA OFFLOAD

QLogic QL45462HLCU 40GbE technology supports RoCE acceleration to deliver low latency, low CPU utilization, and high performance on Windows Server® Message Block Direct 3.0 and 3.02. QL45462HLCU 40GbE Adapters have the unique capability to deliver universal RDMA that provides customers with the choice of a low-latency interconnect that can best utilize the potential of emerging storage technologies such as NVM Express® over Fabrics and Network File System over RDMA (NFSoverRDMA). QLogic’s cutting-edge offloading technology increases cluster efficiency and improves scalability.

### HIGH-DENSITY SERVER VIRTUALIZATION

The latest hypervisors and multicore systems use several technologies to increase the scale of virtualization. The QLogic QL45462HLCU 40GbE adapter supports:

- VMware® NetQueue
- Windows® Hyper-V® Virtual Machine Queue (VMQ)
- Linux® Multiqueue
- Windows, Linux, and VMware switch-independent NPAR
- Windows Hyper-V, Linux Kernel-based Virtual Machine, and VMware ESXi™ SR-IOV

These features provide ultimate flexibility, QoS, and optimized host and VM performance while providing full 40Gbps bandwidth per port. Public and private cloud virtualized server farms can now achieve four times the VM density for the best price and VM ratio.

### WIRE-SPEED NETWORK VIRTUALIZATION

Enterprise-class data centers can be scaled using overlay networks to carry VM traffic over a logical tunnel using NVGRE, VXLAN, and GENEVE. Although overlay networks can resolve vLAN limitations, native stateless offloading engines are bypassed, which places a higher load on the system's CPU. QLogic QL45462HLCU 40GbE technology efficiently handles this load with advanced NVGRE, VXLAN, and GENEVE stateless offloading engines that access the overlay protocol headers. This access enables traditional stateless offloads of encapsulated traffic with native-level performance in the network. Additionally, QLogic QL45462HLCU 40GbE technology supports VMware NSX® and Open vSwitch.

### HYPERSCALE ORCHESTRATION WITH OPENSTACK

QLogic QL45462HLCU 40GbE technology supports the OpenStack open source infrastructure for deploying and orchestrating public, private, and hybrid cloud computing platforms. It provides for both networking and storage services (block, file, and object) for iSER. These platforms allow providers to rapidly and horizontally scale VMs over their entire, diverse, and widely spread network architecture to meet the real-time needs of their customers. The integrated, multiprotocol management utility, QLogic QConvergeConsole, provides breakthrough features that allow customers to visualize the OpenStack-orchestrated data center using auto-discovery technology.

### ACCELERATE TELCO NETWORK FUNCTION VIRTUALIZATION (NFV) WORKLOADS

In addition to OpenStack, QLogic QL45462HLCU 40GbE technology supports NFV that allows decoupling of network functions and services from dedicated hardware (such as routers, firewalls, and load balancers) into hosted VMs. NFV enables network administrators to flexibly create network functions and services as they need them, which reduces CAPEX and OPEX, and enhances business and network services agility. QLogic 40GbE technology is integrated into the Data Plane Development Kit (DPDK) to host the most demanding NFV workloads.

### TRUSTED, RELIABLE, AND INTEROPERABLE

QLogic QL45462HLCU 40GbE technology adheres to standards that ensure interoperability with a wide range of network solutions. Using advanced QLogic technologies based on mature software stacks, enterprise-class data centers can confidently deploy reliable, high-performance networks.

## Host Bus Interface Specifications

### Bus Interface

- PCIe® 3.0 x16, 2.0 x16 (electrical), 1.0 x16 (electrical); x16 (physical connector)

### Host Interrupts

- INTx and MSI-X

### I/O Virtualization

- SR-IOV (up to 240 virtual functions)
- NPAR (up to 16 physical functions)

### Compliance

- PCI Express Base Specification, rev. 3.0
- PCI Express Card Electromechanical Specification, rev. 3.0
- PCI Bus Power Management Interface Specification, rev. 1.2

## Ethernet Specifications

### Throughput

- 40Gbps line rate per port

### Ethernet Frame

- Standard MTU sizes and jumbo frames up to 9,600 bytes

### Stateless Offload

- IP, TCP, and user datagram protocol (UDP) checksum offloads
- TCP segmentation offload (TSO)
- Large send offload (LSO)
- Giant send offload (GSO)
- Large receive offload (LRO)
  - LRO (Linux)
  - Receive segment coalescing (RSC) (Windows)
- Receive side scaling (RSS)
- Transmit side scaling (TSS)
- Interrupt coalescing
- VMware NetQueue, Microsoft® Hyper-V VMQ (up to 512 queues), and Linux Multiqueue

### Network Virtualization

- GRE
- NVGRE
- VXLAN
- GENEVE

## Compliance

- IEEE Specifications:
  - 40GBASE-CR4 (Direct Attach Copper)
  - 40GBASE-SR4 (Multimode Fiber)
  - 802.3-2012 (40Gb Ethernet and 10Gb Ethernet and Ethernet Flow Control)
  - 802.1q (VLAN)
  - 802.1AX- (Link Aggregation)
  - 802.1p (Priority Encoding)
  - IPv4 (RFQ 791)
  - IPv6 (RFC 2460)
  - 802.1Qbb (Priority-Based Flow Control)
  - 802.1Qaz (DCBX/Enhanced Transmission Selection)
  - 802.1Qau (Congestion Notification)
  - 1588-2002 PTPv1 (Precision Time Protocol)
  - 1588-2008 PTPv2

## RDMA Specifications

### Universal RDMA

- RoCE
- RoCEv2
- iWARP
- Storage over RDMA: iSER, SMB Direct, and NVMe™ over Fabrics
- NFSoRDMA

## FCoE Specifications

- Performance
  - 7 million FCoE IOPS

## iSCSI Specifications

- Performance
  - 5.4 million iSCSI IOPS

## Protocols

### Protocols

- L2 NIC
- iSCSI
- FCoE

## Tools and Utilities

### Management Tools and Device Utilities

- QLogic Control Suite integrated network adapter management utility (CLI) for Linux and Windows
- QConvergeConsole PowerKit cmdlets for Linux and Windows
- QConvergeConsole integrated network management utility (GUI) for Linux and Windows
- QConvergeConsole Plug-ins for vSphere® (GUI) and ESXCLI plug-in for VMware
- Native OS management tools for networking

### Boot Support

- Unified Extensible Firmware Interface (UEFI)
- Pre-execution environment (PXE)

### Operating Systems

- For the latest applicable OS information, see <http://driverdownloads.qlogic.com>

## Physical Specifications

### Ports

- QL45462HLCU: Dual 40Gbps QSFP+ and DAC Ethernet ports

### Form Factor

- Low profile PCIe card (6.6in. × 2.54in.)

## Environment and Equipment Specifications

### Temperature

- Operating: 0°C to 55°C (32°F to 131°F)
- Storage: -20°C to 70°C (-4°F to 158°F)

### Humidity

- Operating: 10% to 90%
- Storage: 5% to 95%

### Maximum Cable Distances

- 100m OM3 MMF
- 7m DAC

#### Note:

All advertised features are enabled in the hardware. Actual feature availability is dependent on software driver releases. See the release notes.

Picture may not be representative of the final shipping product.

**Agency Approvals—Safety****US and Canada**

- UL 60950-1
  - CSA C22.2
- 

**Europe**

- TUV EN60950-1
- TUV IEC 60950-1
- CB Certified

**Agency Approvals<sup>1</sup>—EMI and EMC (Class A)****US and Canada**

- FCC Rules, CFR Title 47, Part 15, Subpart Class A
  - Industry Canada, ICES-003: Class A
- 

**Europe**

- EN55022
  - EN55024
  - EN61000-3-2
  - EN61000-3-3
- 

**Japan**

- VCCI: Class A
- 

**New Zealand and Australia**

- AS/NZS: Class A
- 

**Korea**

- KC-RRA Class A
- 

**Taiwan**

- BSMI CNS 13438

**Ordering Information****QL45462HLCU (Dual-port)**

- QL45462HLCU-SP (Single Pack)
- QL45462HLCU-CK (Channel Kit)
- QL45462HLCU-BK (Bulk Kit)
- QSFP+ cage for DAC connectivity
- Can also be used with industry-standard 40G optical modules

<sup>1</sup> Agency approvals are preliminary at the time of initial release.



Follow us:



Share:



[Corporate Headquarters](#) Cavium, Inc. 2315 N. First Street San Jose, CA 95131 408-943-7100